


Digital proportional directional valves high performance

direct, with on-board driver, LVDT transducer and positive spool overlap

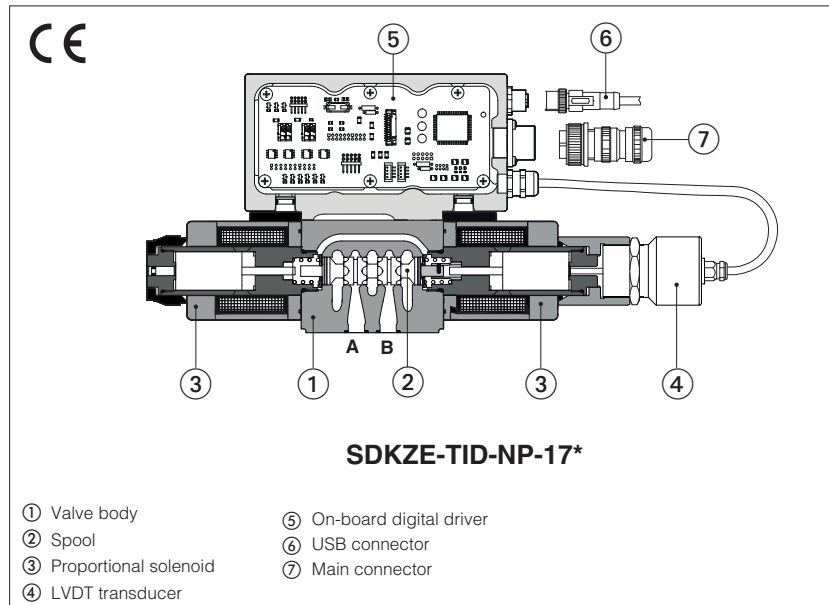

SDHZE-TID, SDKZE-TID

Digital high performances proportional directional valves, direct, with LVDT position transducer and positive spool overlap for directional controls and not compensated flow regulations.

TID on board digital driver performs the valve's hydraulic regulation according to the reference signal sent to the 7 pin main connector.

The software setting of functional parameters can be performed via USB port.

The LVDT transducer grants high regulation accuracy and response sensitivity.

With de-energized proportional solenoids, the mechanical central position of the spool is performed by centering springs.

SDHZE:

Size: **06** - ISO 4401

4/3 and 4/2 way

Max flow: **80 l/min**

Max pressure: **350 bar**

SDKZE:

Size: **10** - ISO 4401

4/3 and 4/2 way

Max flow: **180 l/min**


Max pressure: **315 bar**

1 MODEL CODE

SDHZE	-	TID	-	NP	-	0	71	-	S	5	/	*	-	*	/	*
SDHZE = size 06 SDKZE = size 10														Series number		Seals material , see section 7 : - = NBR PE = FKM
		TID = on-board digital driver and LVDT transducer														
		Fieldbus interfaces , USB port always present: NP = Not present														
Valve size ISO 4401: 0 = 06 1 = 10																Options , see section 9 : B = on-board digital driver connections and LVDT position transducer at side of port A

Configuration: Standard

Option /B

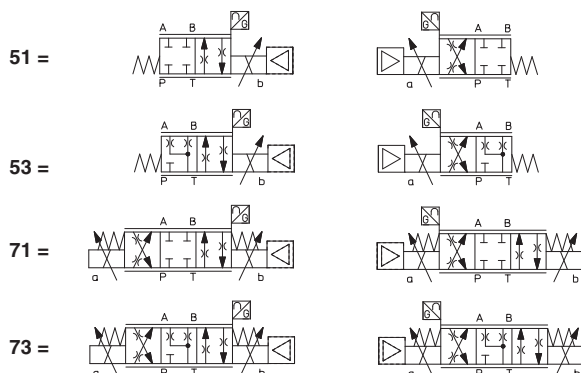

Spool size:	3 (L,S,D)	5 (L,S,D)
SDHZE =	18	28
SDKZE =	45	75

Nominal flow (l/min) at Δp 10 bar P-T

Spool type, regulating characteristics:

L = linear

S = progressive

D = differential-progressive



P-A = Q, B-T = Q/2
P-B = Q/2, A-T = Q

2 GENERAL NOTES

Atos digital proportionals valves are CE marked according to the applicable directives (e.g. Immunity and Emission EMC Directive).


Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in the user manuals included in the E-SW-* programming software.

3 VALVE SETTINGS AND PROGRAMMING TOOLS

Valve's functional parameters and configurations, can be easily set and optimized using Atos E-SW-BASIC programming software connected via USB port to the digital driver.

WARNING: drivers USB port is not isolated! For E-C-SB-USB/M12 cable, the use of isolator adapter is highly recommended for PC protection

USB or Bluetooth connection

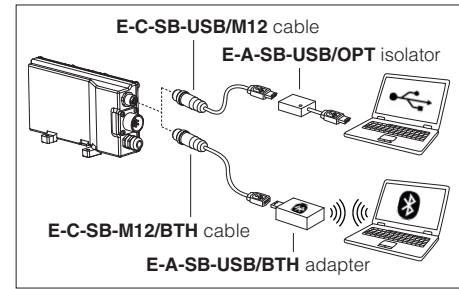

4 GENERAL CHARACTERISTICS

Assembly position	Any position
Subplate surface finishing to ISO 4401	Acceptable roughness index: $R_a \leq 0,8$, recommended $R_a 0,4$ – Flatness ratio 0,01/100
MTTFd valves according to EN ISO 13849	150 years, see technical table P007
Ambient temperature range	Standard = $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$ / PE option = $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$
Storage temperature range	Standard = $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$ / PE option = $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$
Surface protection	Zinc coating with black passivation (body), tin plating (driver housing)
Corrosion resistance	Salt spray test (EN ISO 9227) > 200 h
Conformity	CE according to EMC directive 2014/30/EU (Immunity: EN 61000-6-2; Emission: EN 61000-6-3) RoHS Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

5 HYDRAULIC CHARACTERISTICS - based on mineral oil ISO VG 46 at 50°C

Valve model	SDHZE							SDKZE						
Pressure limits [bar]	ports P, A, B = 350; T = 210							ports P, A, B = 315; T = 210						
Spool type (1)	L3, S3		D3		L5, S5		D5	L3, S3		D3		L5, S5		D5
Nominal flow Δp P-T (2)	[l/min]		P-A A-T	P-B B-T		P-A A-T	P-B B-T		P-A A-T	P-B B-T		P-A A-T	P-B B-T	
	Δp= 10 bar	18	18	9	28	28	14	45	45	22	75	75	37	
	Δp= 30 bar	30	30	15	50	50	25	80	80	40	130	130	65	
	Δp= 70 bar	45	45	22	75	75	37	120	120	60	170	170	85	
Max permissible flow		50	50	25	80	80	40	130	130	65	180	180	90	
Leakage [cm³/min]	<30 (at p = 100 bar); <135 (at p = 350 bar)							<80 (at p = 100 bar); <600 (at p = 315 bar)						
Response time (3) [ms]	≤ 15							≤ 20						
Hysteresis	≤ 0,2 [% of max regulation]													
Repeatability	± 0,1 [% of max regulation]													
Thermal drift	zero point displacement < 1% at ΔT = 40°C													

(1) For spool type **D*** the flow value is referred to $\Delta p/2$ per control edge

(2) For different Δp , the max flow is in accordance to the diagrams in section 8.2

(3) 0-100% step signal

6 ELECTRICAL CHARACTERISTICS

Power supply	Nominal : +24 VDC Rectified and filtered : $V_{RMS} = 20 \div 32 V_{MAX}$ (ripple max 10 % VPP)
Max power consumption	50 W
Max. solenoid current	SDHZE = 2,6 A SDKZE = 3 A
Coil resistance R at 20°C	SDHZE = 3,1 Ω SDKZE = 3,2 Ω
Analog input signals	Voltage: range ± 10 VDC (24 VMAX tollerant) Input impedance: $R_i > 50 \text{ k}\Omega$
Monitor outputs	Output range: voltage ± 10 Vdc @ max 5 mA
Alarms	Solenoid not connected/short circuit, cable break with current reference signal, over/under temperature, valve spool transducer malfunctions, alarms history storage function
Insulation class	H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account
Protection degree to DIN EN60529	IP66 / IP67 with mating connectors
Duty factor	Continuous rating (ED=100%)
Additional characteristics	Short circuit protection of solenoid's current supply; spool position control by P.I.D. with rapid solenoid switching; protection against reverse polarity of power supply
Communication interface	USB - Atos ASCII coding
Communication physical layer	not insulated - USB 2.0 + USB OTG
Recommended wiring cable	LiYCY shielded cables, see section 12


Note: a maximum time of 400 ms have be considered between the driver energizing with the 24 Vdc power supply and when the valve is ready to operate. During this time the current to the valve coils is switched to zero.

7 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult Atos Technical Office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C		
Recommended viscosity	20 ÷ 100 mm²/s - max allowed range 15 ÷ 380 mm²/s		
Max fluid contamination level	normal operation longer life	ISO4406 class 18/16/13 NAS1638 class 7 ISO4406 class 16/14/11 NAS1638 class 5	see also filter section at www.atos.com or KTF catalog
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	


8 DIAGRAMS (based on mineral oil ISO VG 46 at 50 °C)

8.1 Regulation diagrams - values measure at Δp 30 bar P-T

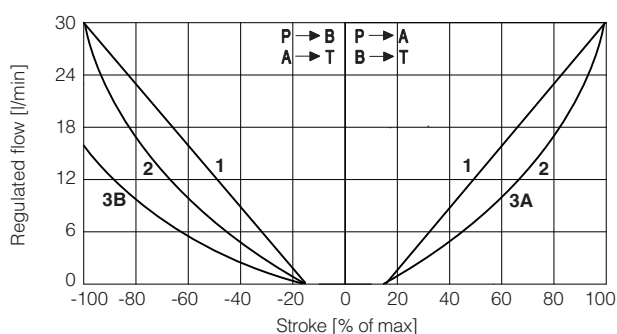


SDHZE

1 = L3 2 = S3 3A = D3 (P → A, A → T)
3B = D3 (P → B, B → T)

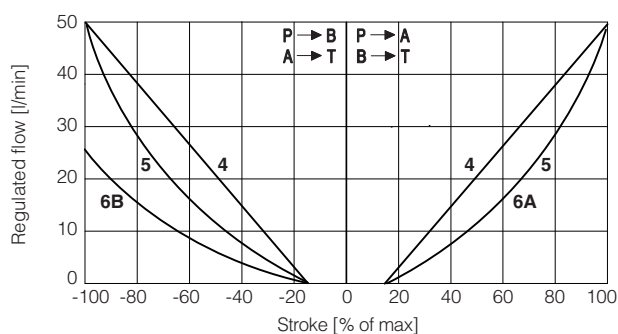


SDHZE

4 = L5 5 = S5 6A = D5 (P → A, A → T)
6B = D5 (P → B, B → T)

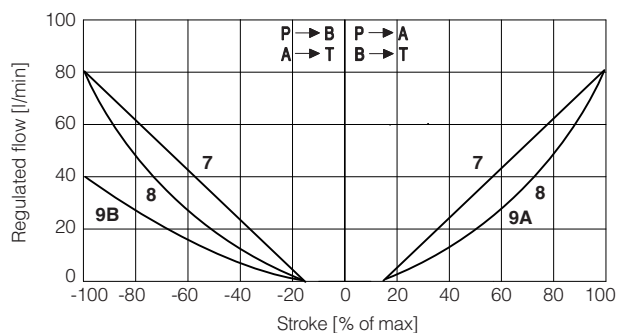

SDKZE

7 = L3 8 = S3 9A = D3 (P → A, A → T)
9B = D3 (P → B, B → T)

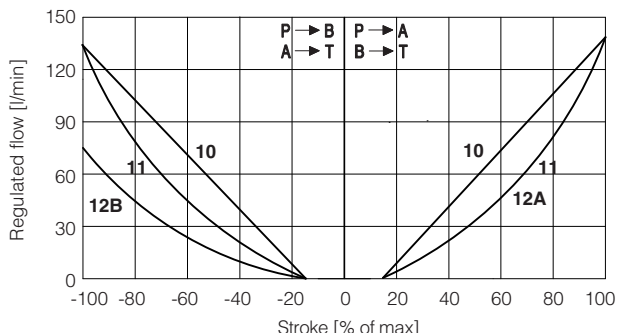

SDKZE

10 = L5 11 = S5 12A = D5 (P → A, A → T)
12B = D5 (P → B, B → T)


Note: Hydraulic configuration vs. reference signal for configuration 71 and 73 (standard and option /B)

Reference signal 0 ÷ +10 V } P → A / B → T

Reference signal 0 ÷ -10 V } P → B / A → T


8.2 Operating limits

SDHZE

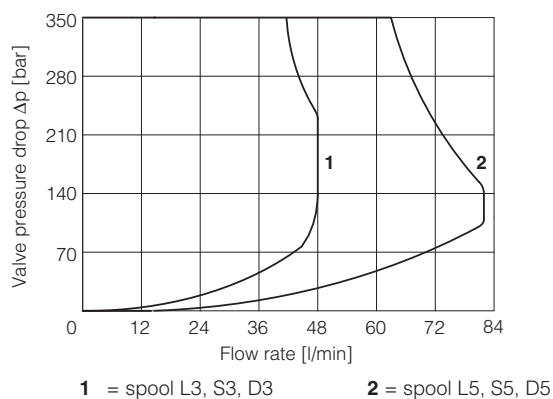

1 = spool L3, S3, D3 2 = spool L5, S5, D5

SDKZE

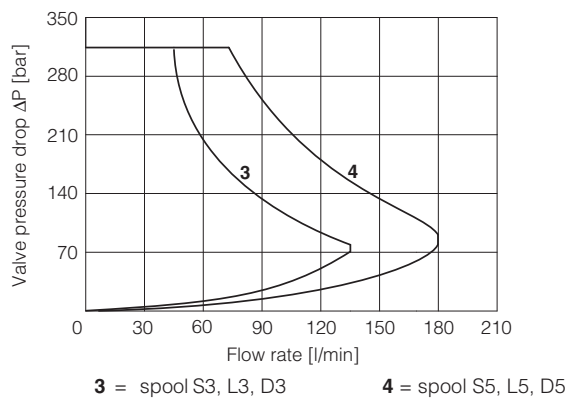

3 = spool S3, L3, D3 4 = spool S5, L5, D5

9 OPTIONS

B = Configurations 51, 53: solenoid, on-board digital driver connections and LVDT transducer at side of port A.
Configurations 71, 73: on-board digital driver connections and LVDT transducer at side of port A.
For hydraulic configuration vs reference signal, see 8.1

10 POWER SUPPLY AND SIGNALS SPECIFICATIONS

Generic electrical output signals of the valve (e.g. monitor signal) must not be directly used to activate safety functions, like to switch-ON/OFF the machine's safety components, as prescribed by the European standards (Safety requirements of fluid technology systems and components-hydraulics, EN-982).

10.1 Power supply (V+ and V0)

The power supply must be appropriately stabilized or rectified and filtered: apply at least a 10000 μ F/40 V capacitance to single phase rectifiers or a 4700 μ F/40 V capacitance to three phase rectifiers.



A safety fuse is required in series to the power supply: 2,5 A time lag fuse.

10.2 Flow reference input signal (Q_INPUT+)

The driver controls in closed loop the valve spool position proportionally to the external reference input signal.
Default range is ± 10 Vdc

10.3 Flow monitor output signal (Q_MONITOR)

The driver generates an analog output signal proportional to the actual spool position of the valve; the monitor output signal can be software set to show other signals available in the driver.

Default range is ± 10 Vdc for standard

Note: Flow reference input signal and flow monitor output signal can be software selected with max range ± 10 Vdc

11 ELECTRONIC CONNECTIONS


11.1 Main connector signals - 7 pin (A1)

PIN	SIGNAL	TECHNICAL SPECIFICATIONS	NOTES
A	V+	Power supply 24 Vdc	Input - power supply
B	V0	Power supply 0 Vdc	Gnd - power supply
C	AGND	Analog ground	Gnd - analog signal
D	Q_INPUT+	Flow reference input signal: ± 10 Vdc maximum range Default is: ± 10 Vdc	Input - analog signal
E	INPUT-	Negative reference input signal for Q_INPUT+	Input - analog signal
F	Q_MONITOR	Flow monitor output signal: ± 10 Vdc maximum range, referred to AGND Default is: ± 10 Vdc	Output - analog signal
G	EARTH	Internally connected to driver housing	

11.2 Communication connectors (B)

(B) USB connector - M12 - 5 pin always present		
PIN	SIGNAL	TECHNICAL SPECIFICATION (1)
1	+5V_USB	Power supply
2	ID	Identification
3	GND_USB	Signal zero data line
4	D-	Data line -
5	D+	Data line +

11.3 Connections layout

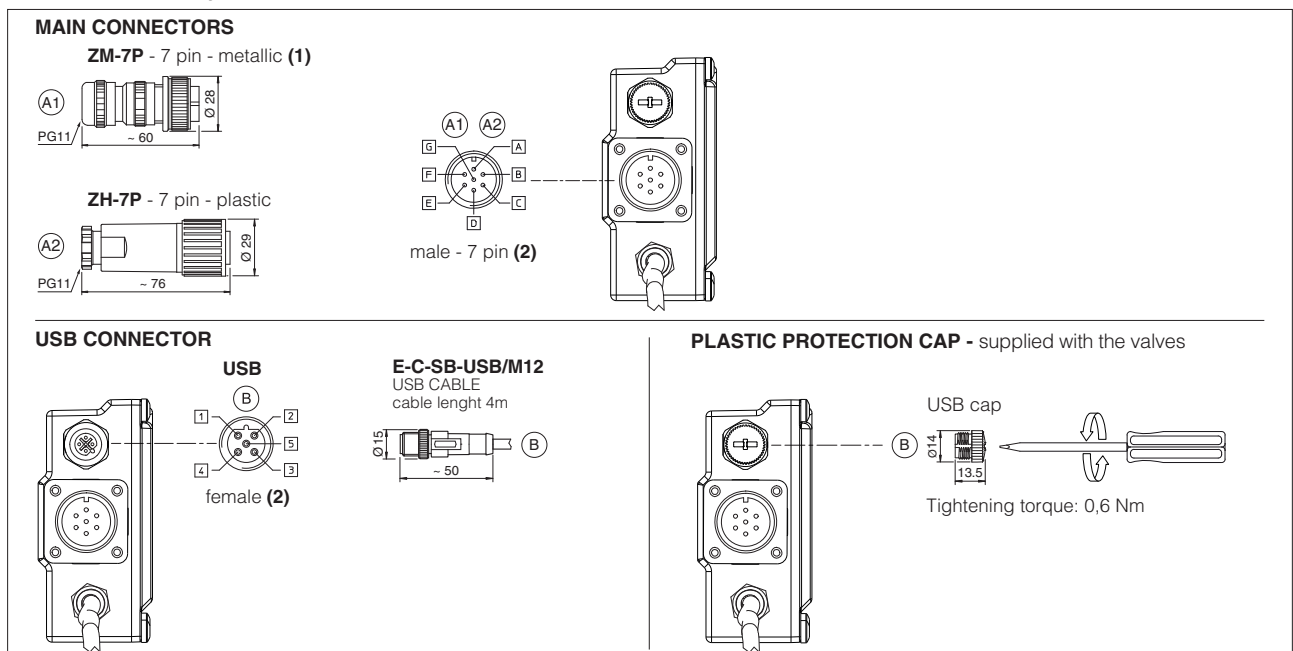


(1) use of metallic connectors is strongly recommended in order to fulfill EMC requirements

(2) pin layout always referred to driver's view

12 CONNECTORS CHARACTERISTICS - to be ordered separately

CONNECTOR TYPE	POWER SUPPLY	POWER SUPPLY
CODE	(A1) ZM-7P	(A2) ZH-7P
Type	7pin female straight circular	7pin female straight circular
Standard	According to MIL-C-5015	According to MIL-C-5015
Material	Metallic	Plastic reinforced with fiber glass
Cable gland	PG11	PG11
Recommended cable	LiYCY 7 x 0,75 mm ² max 20 m (logic and power supply) or LiYCY 7 x 1 mm ² max 40 m (logic and power supply)	LiYCY 7 x 0,75 mm ² max 20 m (logic and power supply) or LiYCY 7 x 1 mm ² max 40 m (logic and power supply)
Conductor size	up to 1 mm ² - available for 7 wires	up to 1 mm ² - available for 7 wires
Connection type	to solder	to solder
Protection (EN 60529)	IP 67	IP 67

13 FASTENING BOLTS AND SEALS

	SDHZE Fastening bolts: 4 socket head screws M5x30 class 12.9 Tightening torque = 8 Nm	SDKZE Fastening bolts: 4 socket head screws M6x40 class 12.9 Tightening torque = 15 Nm
	Seals: 4 OR 108 Diameter of ports A, B, P, T: Ø 7,5 mm (max)	Seals: 5 OR 2050 Diameter of ports A, B, P, T: Ø 11,2 mm (max)


14 INSTALLATION DIMENSIONS [mm]

SDHZE-TID-NP-*





ISO 4401: 2000 (see table P005)
Mounting surface: 4401-03-02-0-05

P, A, B, T = Ø 7,5 max

Y = Ø 3,3 max

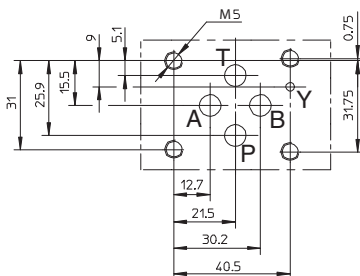


Valve	Mass [kg]
DHZE-05*	2,5
DHZE-07*	3

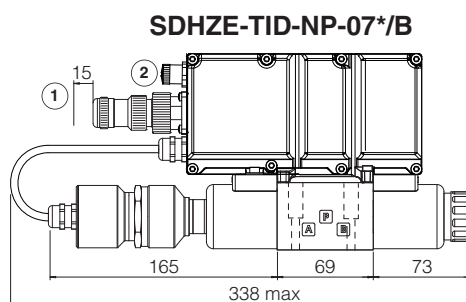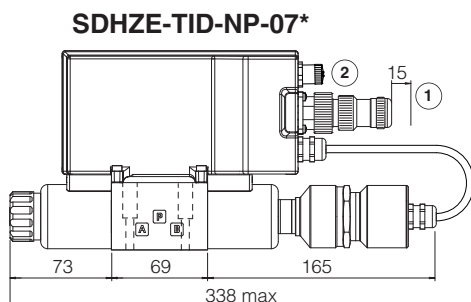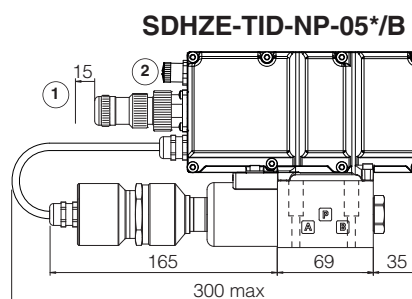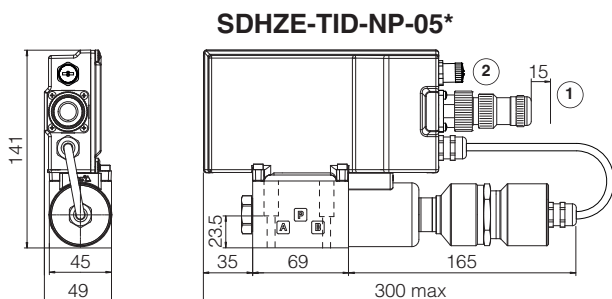


ISO 4401: 2000 (see table P005)
Mounting surface: 4401-05-04-0-05

X, Y = Ø 6,3 max

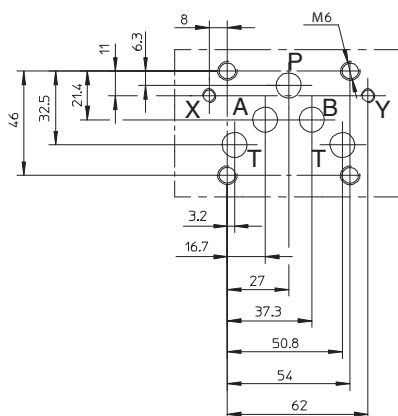

Valve	Mass [kg]
DKZE-15*	5,5
DKZE-17*	7,1

[illegible]

Technical drawing of the 1500W power supply unit. The drawing shows the side profile of the unit with dimensions: 36, 92, 190, and 345 max. The unit features a connector labeled '1' and a dimension of 15. The unit also has a connector labeled '2' and a dimension of 15. The unit is labeled with 'B' and 'A' in boxes, and a 'P' in a box. The unit is shown with a cable connected to a connector labeled '1'.

[illegible]

- ① = Space to remove the connectors
- ② = The dimensions of all connectors must be considered, see section 11.3